

PAR20 20W Metal Halide Equivalent



Part Number

BLV2027SS-NVW11H

BLV2027M-NVW11H

BLV2027W-NVW11H

NON DIMMABLE

CERTIFICATE



IEC/EN 55015

IEC/EN 61547

IEC/EN 61000-3-2

IEC/EN 60111-3-95


IEC/EN 62838

Specification

Voltage(V) **100-240**Power(W) **11**Frequency(Hz) **50/60**Flux(lm) **1000**Useful Flux(lm) **900**Efficiency(lm/w) **93**Power Factor **>0.9**CCT Option(K) **2700**CRI **80+**Beam Angle(°) **15/25/35**Base **E27**Energy Efficiency
Class **F**Operating
Temperature(°C) **-20~40****SPOT
Focus****COLOR
PRO**
R9>50
R13>85
R15>85


2D Diagram

Dimmension(mm)	Ø63*89
Weight(g)	180
Base	E27

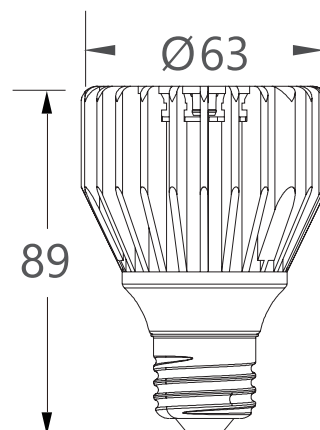


Base Type : E27


Luminous Intensity Distribution Diagram




15°




7890 lx




25°



3585 lx



35°



2380 lx

Package

	G.W	V.W	Size	Carton Number
White Box	230g	-	76*76*138mm	1pc of lamp
Outer Carton	19Kg	15Kg	670*417*323mm	80pcs of white box

Safety Instructions

Warning

- The retrofits & fixtures should be used with the specified wattage in appropriate equipment or retrofits & fixtures house to prevent breakage or overheating.
- Operate the retrofits & fixtures in the appropriate position if specified to prevent damage or overheating.
- Turn off the electrical power in the conditions of installation, removing, or cleaning the retrofits & fixtures.
- Keep the retrofits & fixtures out of reach to the children.

Environment Notice

- Please avoid installing or operating the retrofits & fixtures under the following conditions:
- A place where the retrofits & fixtures is hit by rain or water drops unless necessary ingress protection is marked.
- A place with high humidity unless necessary ingress protection is marked.
- A place where the atmosphere contains inflammable substances such as gasoline, lacquer, or dust.
- A place near flammable objects such as gasoline, spray, chemicals, paints, oil, ...etc.
- An acid environment
- A place that is likely to be impacted by force or vibration

Installation instructions

- Remove package before installation of retrofits & fixtures.
- Follow installation instructions in the package.
- Do not use bare hands or stained gloves to install the new retrofits & fixtures or remove the existing retrofits & fixtures.

False operations

- To prevent damage, burn or injury, please avoid the following operations:
- Cover retrofits & fixtures with paper, fabric, or any flammable material to avoid burning.
- Insert metal object into the gap of retrofits & fixtures base.
- Disassemble or reconstruct the retrofits & fixtures
- Stare directly at the retrofits & fixtures while the retrofits & fixtures is operating,
- Wash the retrofits & fixtures with water or any detergent
- Install the retrofits & fixtures in the sealed fixture unless particularly remarked in datasheet.
- Install the retrofits & fixtures on a damaged socket.
- Paint or put colors on the retrofits & fixtures.

Transformer & Dimmer Selection Guide (for 12V device)

12V AC Transformer:

There are two types transformer available commercially:

A. Magnetic AC Transformer:

The traditional heavy transformer without electronic components can be coped with our products with good compatibility.

B. Electronic AC Transformer:

The traditional economic transformer used mainly for MR16 halogen lamp, usually performs poor compatibility for low voltage LED lamp. We don't suggest this type of transformer due to the frequent problems such as no light or flicker..

12V DC Transformer:

There is no problem to use DC transformer with our low voltage products due to its high stability.

Dimmer Selection:

When 12V DC transformer is used, the traditional Triac dimmer cannot work. Therefore, the dimming effect of low voltage LED Lamp heavily depends on the AC transformer. The different brands of dimmers also affect the dimming performance. Please contact us if you want to know further dimming effect of our low voltage LED Lamp.

Dimming Guide (Dimmable Device)

- BLTC's dimmable retrofits & fixtures can work with most of leading edge (TRIAC) and trailing edge dimmers, however 100% compatibility cannot be guaranteed due to the variety and quality of dimmers in the market. Some of the compatibility issues may include audible noise, flickering and higher light output when the dimmer is set at a certain level.
- Most (non-LED dedicated) dimmers can be loaded with LED light sources up to 20% of dimmer specified maximum power. Example: Dimmer 600W -> 20% = 120W, which means that e.g. up to 12 pcs 10W LED light sources can be connected.
- When connected to a dimmer in its off-state, a LED light source may still emit a small, yet visible amount of light, while a low quantity of LED light sources is connected.
- The time it takes to turn on the light may vary with different kind of dimmer switch.
- Various dimmer suppliers offer "active loads" to optimize dimming performance in case of light source-dimmer system issues.
- Do not use dimmer with non-dimmable bulbs to avoid damage and burning.
- Mixed loads may cause unexpected dimming behavior or even result in defects, for which BLTC is not responsible.
- Sometimes the retrofits & fixtures may fail to dim when working with the following kinds of dimmers.
 - sensor dimmers
 - stepping dimmers
 - remote control dimmers
 - dimmers with memory
- When more than one bulb is connected to a dimmer, the brightness of each bulb may vary depending on its characteristic.
- Minor noises may occur when turning dimmers.
- If the light flickers when dimming, please adjust the dimmer until the light is tuned to a steady level.